



GG Series Gauge Guards

1/4" x 1/4" PVC, CPVC AND PP

1/4" x 1/2" PVC, CPVC AND PVDF

KEY FEATURES

- Available in PVC, CPVC, PP and PVDF
- Threaded NPT Connections
- FPM Membrane
- All Thermoplastic, No Rust or Corrosion
- No Metal Fasteners
- Rugged, Low Profile, Compact Design
- Work in any Position
- Dual Face Scale

OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- 0 to 160 PSI SS Liquid Filled Gauge and Liquid Damped



TECHNICAL INFORMATION

SPECIFICATIONS

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" x 1/4" (DN8 – DN8)	PVC, CPVC or PP	NPT	FPM	150 PSI @ 70°F Non-Shock
1/4" x 1/2" (DN8 – DN15)	PVC, CPVC or PVDF			

GG Series Gauge Guards


1/4" x 1/4" PVC, CPVC AND PP
1/4" x 1/2" PVC, CPVC AND PVDF



www.monarchindustrial.com.au

PARTS LIST

1. Gauge/Instrument
2. Body
3. Oil-Filled Upper Chamber with Installed Gauge
4. FPM Membrane
5. Union Nut
6. End Connector

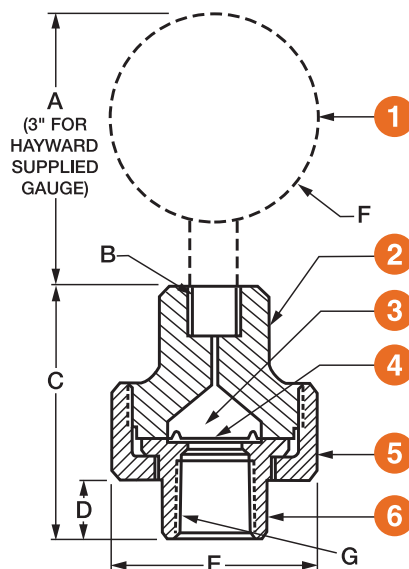


DIMENSIONS

SIZE in / DN	MATERIAL	A	B in / mm	C in / mm	D in / mm	E in / mm	F in / mm	G
1/4 x 1/4 / 8 x 8	PVC, CPVC and PP	3.0 / 76	1/4" NPT	2.69 / 68	.61 / 15	2.25 / 57	2.3 / 58	1/4" NPT
1/4 x 1/2 / 8 x 15	PVC and CPVC	3.0 / 76	1/4" NPT	2.69 / 68	.61 / 15	2.25 / 57	2.3 / 58	1/2" NPT
1/4 x 1/2 / 8 x 15	PVDF	3.0 / 76	1/4" NPT	2.25 / 57	.35 / 9	2.0 / 51	2.0 / 51	1/2" NPT

Dimensions are subject to change without notice – consult factory for installation information

OPERATING PRESSURE/TEMPERATURE

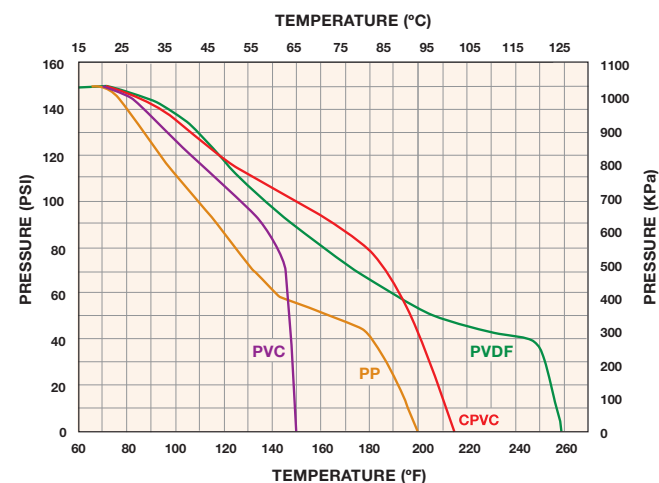

Hayward is a registered trademark
of Hayward Industries, Inc.
© 2018 Hayward Industries, Inc.