

COVER MAY SWING
TO REMOVE ELEMENT

ALL DIMENSIONS NOMINAL

BLEED SCREW

EYE NUTS FITTED
AS STANDARD
HEX NUTS OR
HAND-NUTS
OPTIONAL


PRESSURE TEST
INFORMATION LABEL

ELEMENT AREA

WEIGHT OF FILTER

MAX WORKING PRESSURE

TEST PRESSURE

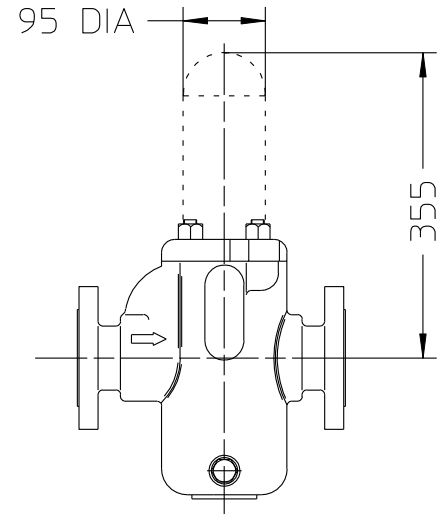

SPACE TO REMOVE ELEMENT

FLANGE TYPE	
REQUIREMENTS	
P.C.D OF HOLES	
DIA OF R/F	
R/F THICKNESS	
NO OF HOLES	
DIA OF HOLES	

- 514cm2
- 26 kg
- 16 bar
- 32 bar

WWW.MONARCHINDUSTRIAL.COM.AU

1/2" DRAIN MAY
BE ON OTHER SIDE



UNLESS SPECIFIED GENERAL TOLERANCE 0 DEC PLACE +/- 1 1 DEC PLACE +/- 0.4 2 DEC PLACE +/- 1.0 ANGULAR +/- 2 Deg	APPROVED	MATERIAL	DESCRIPTION GENERAL ARRANGEMENT DN50 Flanged Single Filter
	DRAWN A.S.N.		
MODIFICATION DRAIN WAS UNDER INLET	DATE 26/6/3	C 2003 This drawing and the design is the property of OXFORD FILTRATION LIMITED and may not be copied or used for any purpose other than that for which it was supplied unless expressly stated in writing	DRG NO. 12053
			ISS 3