



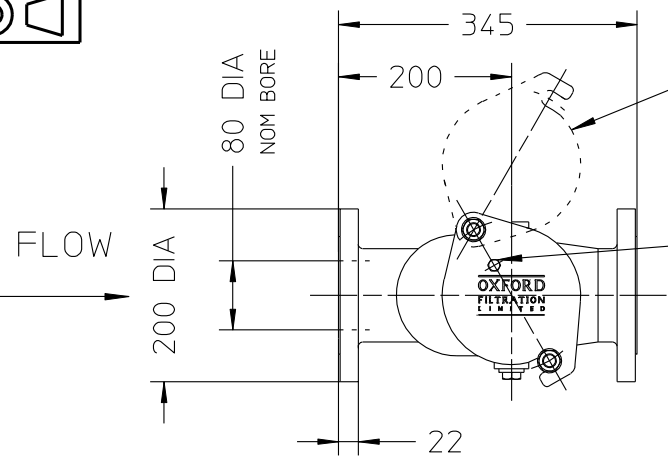


COVER MAY SWING
TO REMOVE ELEMENT

BLEED SCREW



SPACE TO REMOVE ELEMENT

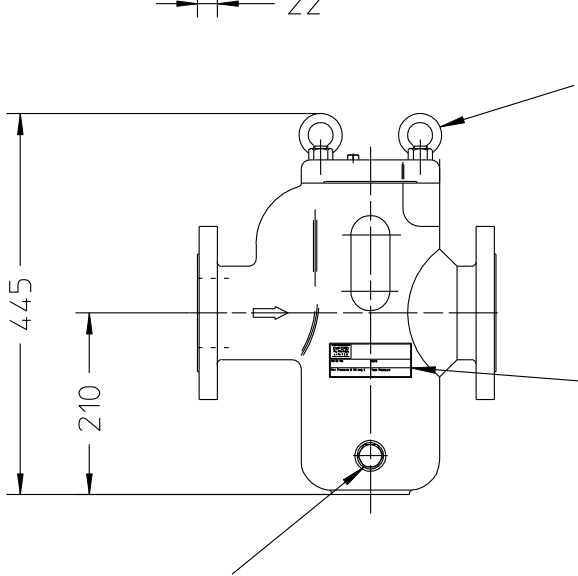

EYE NUTS FITTED
AS STANDARD
HEX NUTS OR
HAND-NUTS
OPTIONAL

PRESSURE TEST
INFORMATION LABEL

1/2" DRAIN MAY
BE ON OTHER SIDE

FLANGE TYPE	
REQUIREMENTS	
P.C.D OF HOLES	
DIA OF R/F	
R/F THICKNESS	
NO OF HOLES	
DIA OF HOLES	

ELEMENT AREA	-	765cm ²
WEIGHT OF FILTER	-	38 kg
MAX WORKING PRESSURE	-	16 bar
TEST PRESSURE	-	24 bar



www.monarchindustrial.com.au

ALL DIMENSIONS NOMINAL

UNLESS SPECIFIED GENERAL TOLERANCE 0 DEC PLACE +/- 1 1 DEC PLACE +/- 0.4 2 DEC PLACE +/- 1.0 ANGULAR +/- 2 Deg	APPROVED	MATERIAL	DESCRIPTION GENERAL ARRANGEMENT DN80 Flg Single Filter	
	DRAWN A.S.N.	OXFORD FILTRATION LIMITED		
MODIFICATION DRAIN WAS UNDER INLET	DATE 10/3/04	C 2004: The drawing and the design is the property of OXFORD FILTRATION LIMITED and may not be copied or used for any purpose other than that for which it was supplied unless expressly stated in writing	DRG NO. 12068	ISS 2