

SPEEDO[®] FILTER HOUSING

Multi Bag series

**Quick opening design
improves work efficiency
with high safety
performance**



Speedo[®] series of multi-bag filter housings features a self-balancing V-clamp locking mechanism, a break-through from conventional designs. Its single-handed, user-friendly operation makes Speedo your ideal choice for applications with high flow rates requiring frequent bag change-outs. Cost-effective bag filtration ensured by a rugged, corrosion-free V-clamp and exclusive proprietary screw-drive for years of smooth service.

Applications

- Automotive Coatings
- Copper Foil
- Food and Beverage
- Pulp and Paper
- Paints, Inks, Resins and Coatings
- Electronics
- Silicone Industry

Features and benefits

- Self-balancing V-clamp locking mechanism for fast and easy operation.
- Single-handed, user-friendly operation, ideal for applications with high flow rates requiring frequent bag change-outs.

- Minimal downtime reduces operating costs.
- Fully interlocked design for safety under any conditions.
- Proprietary screw-drive for years of smooth service.
- Rugged, corrosion-free V-clamp ensure cost-effective bag filtration.

Filter specifications

No. of Filter Bags

3 / 4 / 6 / 8 / 12 / 17 / 23

Filter Bag Sizes^{1*}

01: Size 01

02: Size 02

Inlet & Outlet

DIN / ANSI

Max. Flow Rates^{2*}

920 m³ / h

Maximum operating temperatures^{3*}

150 °C


Max. Operating Pressure

10 bar (145 psi)

^{1*} Size 01 only for No. 3 / 4 bag filter

^{2*} Depending on filter element / fluid

^{3*} Applicable temperature is determined based on filter bag and seal material

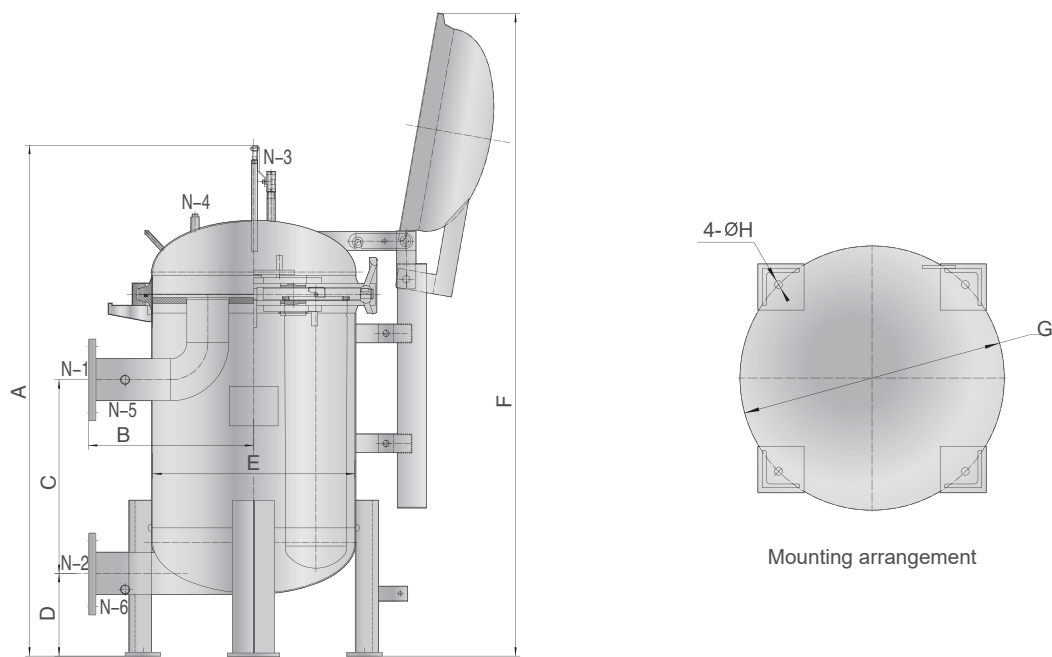

Retention ratings

Dimensions	3 bags	4 bags	6 bags	8 bags	12 bags	17 bags	23 bags
A	1420mm (56")	1342mm (53")	1495mm (60")	1468mm (58")	1612mm (64")	1640mm (65")	1700mm (68")
B	400mm (16")	450mm (18")	520mm (20")	600mm (24")	680mm (27")	750mm (30")	820mm (33")
C	520mm (20")	527mm (21")	450mm (18")	528mm (21")	528mm (21")	450mm (18")	535mm (21")
D	250mm (10")	225mm (9")	300mm (12")	200mm (8")	220mm (9")	250mm (10")	250mm (10")
E	500mm (20")	550mm (22")	600mm (24")	750mm (30")	950mm (37")	1050mm (42")	1200mm (48")
F	1806mm (71")	1781mm (70")	1917mm (75")	2029mm (79")	2256mm (88")	2421mm (95")	2586mm (101")
G	475mm (19")	525mm (21")	580mm (23")	735mm (29")	930mm (37")	1040mm (41")	1195mm (47")
H	Ø18	Ø18	Ø18	Ø18	Ø24	Ø24	Ø24
Specifications	3 bags	4 bags	6 bags	8 bags	12 bags	17 bags	23 bags
Inlet (N1) / Outlet (N2)	DN80 PN16 (3" 150#)	DN100 PN16 (4" 150#)	DN150 PN16 (6" 150#)	DN150 PN16 (6" 150#)	DN200 PN16 (8" 150#)	DN250 PN16 (10" 150#)	DN250 PN16 (10" 150#)
Vent Valve (N3)	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")
Pressure Gauge (N4)	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")	NPT1/2"(Rc1/2")
Drain (N5/N6)	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")	NPT1 1/4" (Rc1 1/4")
Vessel Volume	180 L (48 gal)	225 L (59 gal)	274 L (72 gal)	450 L (119 gal)	750 L (198 gal)	995 L (263 gl)	1336 L (353 gal)
Net Weight	155 kg (342 lb)	210 kg (463 lb)	255 kg (562 lb)	315 kg (694 lb)	620 kg (1367 lb)	880 kg (1940 lb)	1000 kg (2205 lb)